
|   | 8                | 7                      | 6                  | 5          | 4 | 3 |
|---|------------------|------------------------|--------------------|------------|---|---|
|   | BASE PART NUMBER | THICKNESS              | MATERIAL           | PLATING    |   |   |
|   | 0078-0108        | 0.051 ± 0.005 [0.0020] | BeCu ALLOY 25 TH01 | BRIGHT TIN |   |   |
| D |                  |                        |                    |            |   |   |




С

В

А

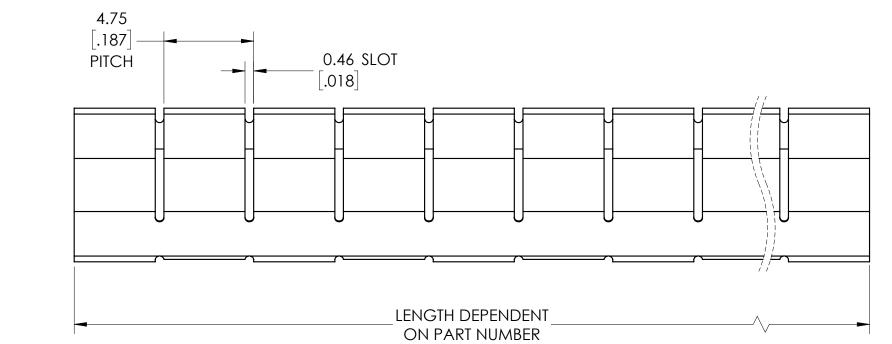

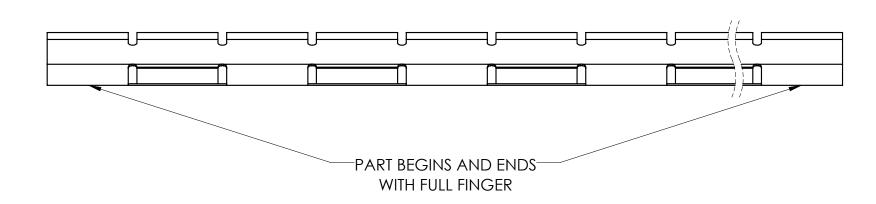

|   |   |   |   | Γ | UNITS: MM [INCH  | ]                       |                      |  |
|---|---|---|---|---|--|-------------------------|----------------------|--|
|   |   |   |   | _ | TOLERANCES:<br>$X.X = \pm 0.4$                                       |                         |                      |  |
|   |   |   |   |   | $\begin{array}{l} X.XX = \pm \ 0.2 \\ X.XXX = \pm \ 0.1 \end{array}$ | 3RD ANGLE<br>PROJECTION | (+)                  |  |
|   |   |   |   |   | ANGULAR:<br>X° = ± 3°  | DESIGNED IN             | DESIGNED IN SOLIDWOR |  |
|   |   |   |   |   | $X.X^{\circ} = \pm 1.0^{\circ}$                                      | SCALE: 5:1              | SHEET                |  |
| 8 | 7 | 6 | 5 | 4 |  | 3                       |                      |  |

| 2           | 1                     | _ |
|-------------|-----------------------|---|
| PART NUMBER | LENGTH                |   |
| LT18CJ1920  | 51.79 ± 0.76 [2.039]  |   |
| LT18CJ1921  | 61.29 ± 0.76 [2.413]  | D |
| LT18CJ1922  | 118.29 ± 1.27 [4.657] |   |
| LT18CJ1923  | 127.79 ± 1.27 [5.031] |   |
| LT18CJ4430  | 42.29 ± 0.76 [1.665]  |   |
|             | •                     |   |

С

В

