


IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	160 Ω	348 Ω	514 Ω
Minimum	- Ω	278 Ω	- Ω

Z vs. FREQUENCY
(REF. ONLY)

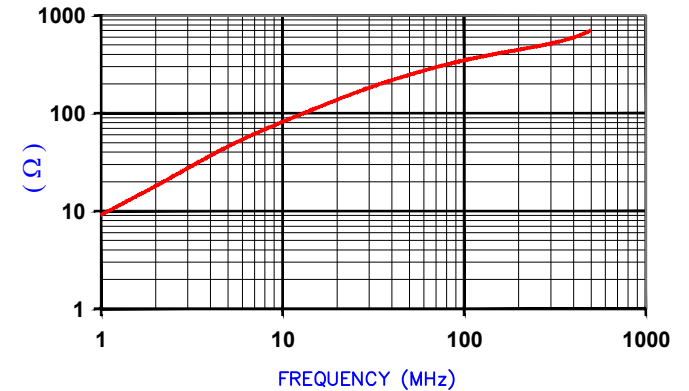

AGILENT E4991A Impedance/Material Analyzer
HP 16092A-Test Fixture. TEST REF. 5452

CASE DIMENSIONS:

A	24.82 [.977]	+	1.00 [.039]
B	10.00 [.394]	+	1.00 [.039]
C	55.91 [2.201]	+	2.00 [.079]
D	-	+	-
E	7.20 [.283]	+	1.00 [.039]

NOTES:

1. CASE COLOR: WHITE-0A0.
2. CASE FLAMMABILITY RATING: UL94 V-2.
3. CASE MATERIAL: Halogen Free Nylon
4. CORE DIMENSIONS REFER TO 28A0807-000 SPEC. FERRITE CORE DIMENSION IS FOR INTERNAL PURPOSE TO ENHANCE FITTING TO CASE AND ELECTRICAL CHARACTERISTICS ONLY.

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.				
REV	DESCRIPTION	DATE	INT					PROJECT/PART NUMBER:
B	UPDATE CASE DIMENSIONS REMOVE CORE DIM AND ADD NOTE 4	03/14/14	Jcai	28A0807-0A0		B	FERRITE SNAP-ON	Jcai
A	ORIGINAL DRAFT	05/16/13	Jcai	DATE:	03/14/14	SCALE:	1:1	MATERIAL:
REV	DESCRIPTION	DATE	INT	CAD #	28A0807-0A0-B	TOOL #	-	Ferrite