
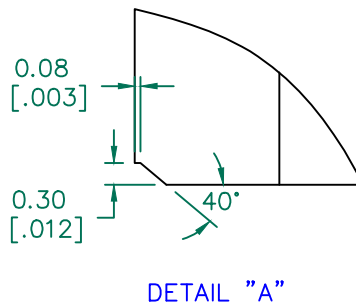
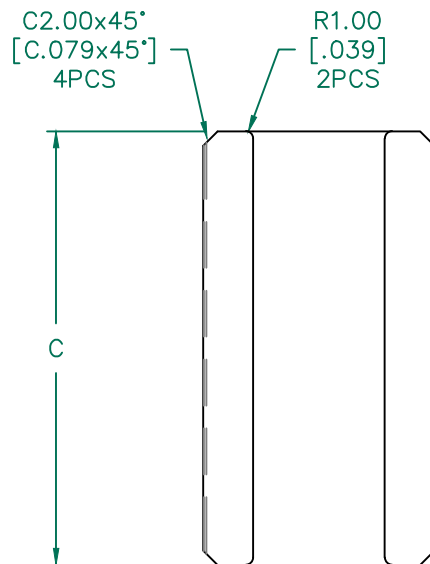


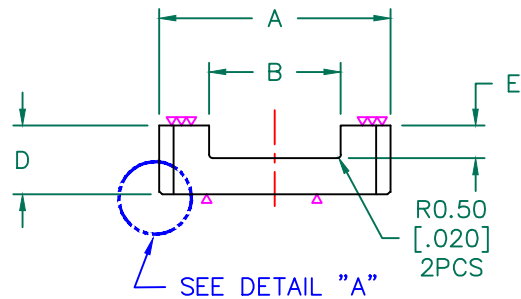

NET IMPEDANCE (Z)

Frequency	0.5 MHz	1 MHz	5 MHz
Nominal (REF)	63 Ω	123 Ω	84 Ω
Minimum	46 Ω	92 Ω	63 Ω

FERRITE CORE DIMENSIONS (SPEC): mm [in]

A	32.00 [1.260]	+	0.60 [.024]
B	18.20 [.717]	+	0.40 [.016]
C	60.00 [2.362]	+	1.00 [.039]
D	9.50 [.374]	+	0.20 [.008]
E	4.50 [.177]	+	0.25 [.010]

WEIGHT/1000 64.00 kgs [141.11 Lbs]

NOTES: UNLESS OTHERWISE SPECIFIED

1. COSMETIC SPECIFICATION REFER TO WI-QA-038.
2. THE CONTACT SURFACE NEED TO BE POLISHED.

RoHS

DIMENSIONS ARE IN mm[INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved. Laird				
				PROJECT/PART NUMBER:		REV	PART TYPE:	DRAWN BY:
				35U1260-220		A	CNZ CORE	Jcai
				DATE: 09/15/17		SCALE: 1 : 1		MATERIAL: Ferrite
				CAD # 35U1260-220-A		TOOL # U1260		
A	ORIGINAL DRAFT		09/15/17	Jcai				
REV	DESCRIPTION		DATE	INT				

Laird

Drawn By: Jcai