


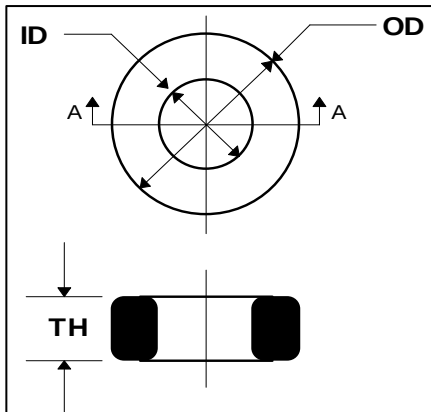

CORE DIMENSIONS **37T0501-100**

UNCOATED CORE					
	MM	INCHES		MM	INCHES
OD	12.70	(.500)	±	.25	(.010)
ID	7.14	(.281)	±	.15	(.006)
TH	6.35	(.250)	±	.18	(.007)

WEIGHT / K 2.6829 KGS 5.9147 LBS
INITIAL PERMEABILITY **7500**

ROOM TEMPERATURE ELECTRICAL SPECIFICATION

	MIN. TOL.	MIN. (μ H)	NOM. (μ H)	MAX. (μ H)	MAX. TOL.	FREQ. (kHz)	VOLT. (mV)	GAUSS	TURNS
L1-1T	-25.0%	4.117	5.489	6.861	25.0%	100	7.63	10	1
Q Ref.		6				100	7.63	10	1

NOTES:



Rev	Description	Date	INT
A	Original Draft	2010-7-21	Jcai

Date: 2010-7-21	DWG # 37T0501-100-A	Rev:
Drawn By: Jcai	Title # 37T0501-100	A

Steward This document contains information which is proprietary to Steward. No production or publication of this document in whole or in part shall be made without written authorization from Steward.

UNCONTROLLED DOCUMENT