


HZ0603A102R-10

PHYSICAL DIMENSIONS:



A	1.60 [.063]	+ 0.15	-.006	[.006]
B	0.80 [.031]	+ 0.15	-.006	[.006]
C	0.80 [.031]	+ 0.15	-.006	[.006]
D	0.36 [.014]	+ 0.15	-.006	[.006]

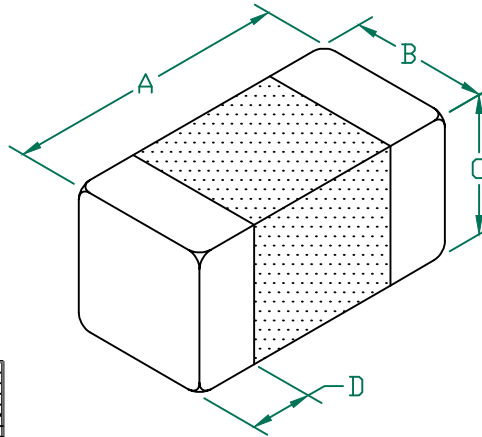


ELECTRICAL CHARACTERISTICS:			
	Z @ 100MHz (Ω)	DCR (Ω)	Rated Current
Nominal	1000		
Minimum	750		
Maximum	1250	0.60	190 mA

NOTES: UNLESS OTHERWISE SPECIFIED

1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 7" REELS, 4000 PCS/REEL. PREHEATED BEFORE SOLDERING.
2. COMPONENTS SHOULD BE ADEQUETELY
3. TERMINATION FINISH IS 100% TIN.
4. THE OPERATEING TEMPERATURE: -40°C~+125°C.

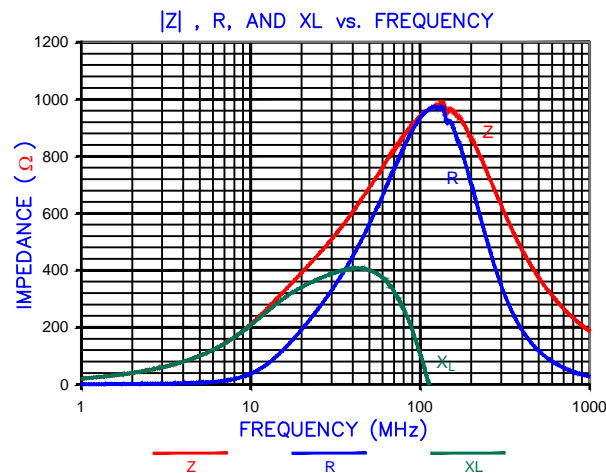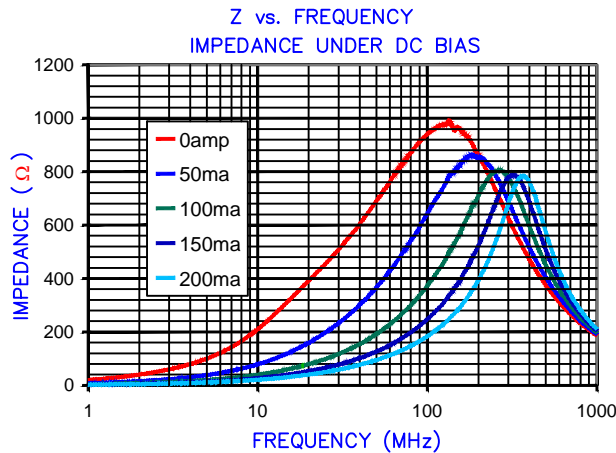


LAND PATTERNS FOR REFLOW SOLDERING

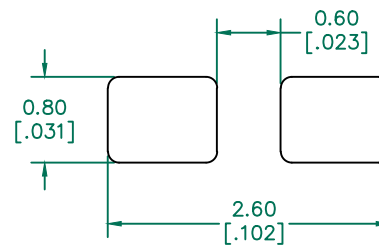

(For wave soldering, add 0.762 [.030] to this dimension)

RECOMMENDED SOLDERING CONDITIONS

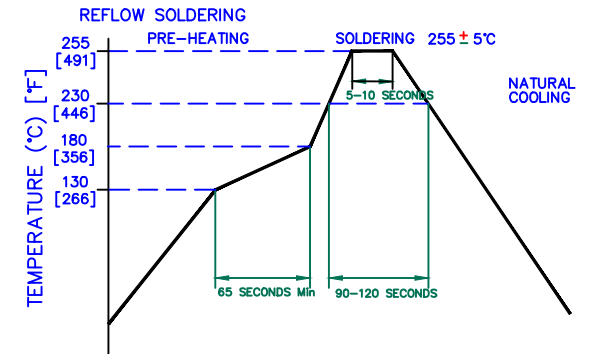

RoHS

DIMENSIONS ARE IN mm [INCHES]				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.		Laird	
				PROJECT/PART NUMBER:	REV	PART TYPE:	DRAWN BY:
				HZ0603A102R-10	A	CO-FIRE	QU
				DATE:	SCALE:	SHEET:	
				03/01/11	-	1 of 1	
				CAD #	TOOL #		
				HZ0603A102R-10-A			
				REV	DESCRIPTION	DATE	INT