


HZ0603C601R-11

UNCONTROLLED DOCUMENT

PHYSICAL DIMENSIONS:


A	1.60 [.063]	+ 0.15	[.006]
B	0.80 [.031]	+ 0.15	[.006]
C	0.80 [.031]	+ 0.15	[.006]
D	0.36 [.014]	+ 0.15	[.006]

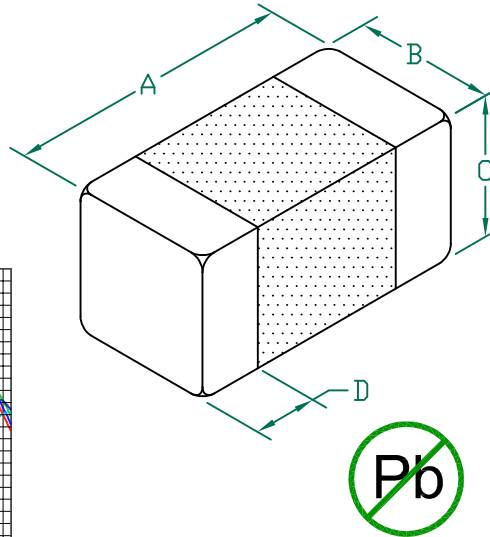


ELECTRICAL CHARACTERISTICS:			
Z @ 100MHz (Ω)	DCR (Ω)	Rated Current	
Nominal	600		
Minimum	450		
Maximum	750	0.60	300 mA

NOTES: UNLESS OTHERWISE SPECIFIED

1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 7" REELS, 4000 PCS/REEL.
2. TERMINATION FINISH IS 100% TIN.
3. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
4. OPERATING TEMP. RANGE: -40°C~+125°C (INCLUDING SELF-HEATING)


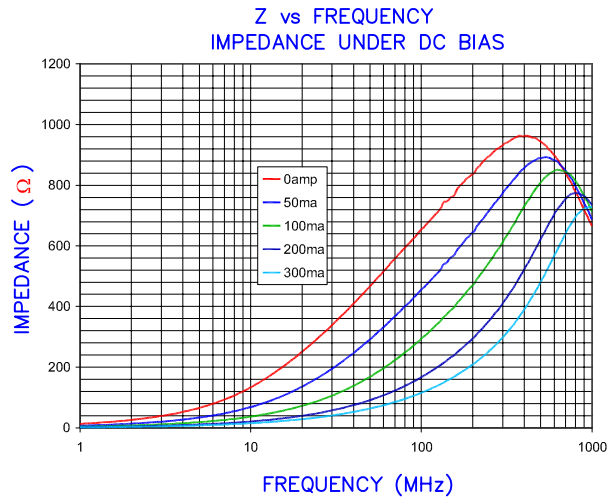


LAND PATTERNS FOR REFLOW SOLDERING

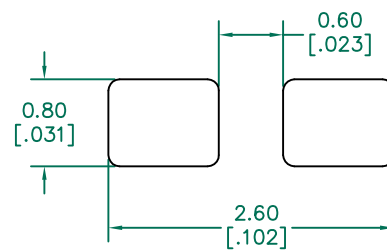

(For wave soldering, add 0.762 (.030) to this dimension)

RECOMMENDED SOLDERING CONDITIONS

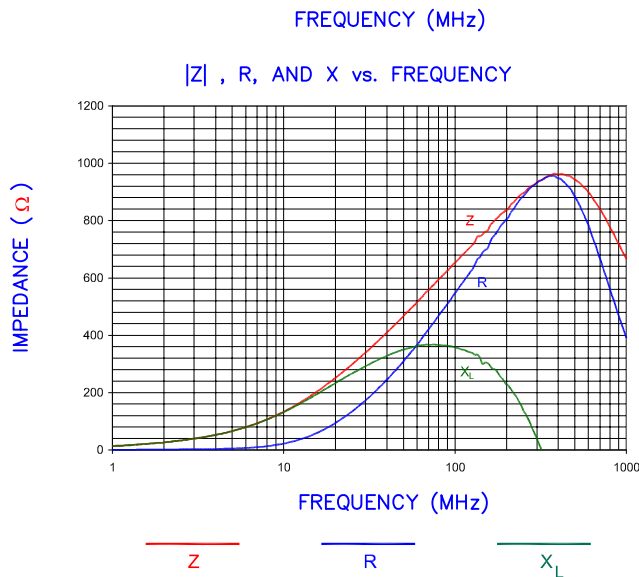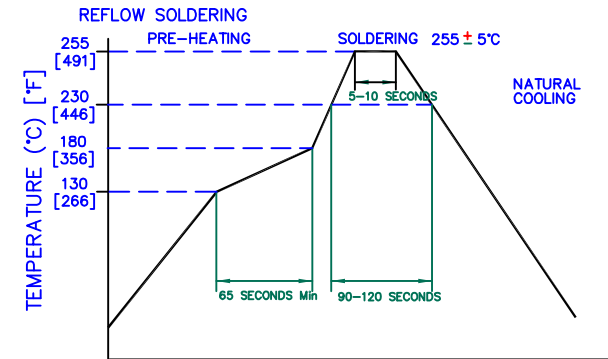

AGILENT E4991A RF Impedance/Material Analyzer
HP 16194A Test Fixture. TEST REF. 3124

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.				
				Laird				
				PROJECT/PART NUMBER:		REV:	PART TYPE:	DRAWN BY:
				HZ0603C601R-11		B	CO-FIRE	WEI
				DATE: 03/01/11		SCALE: -		SHEET:
				03/01/11		-		2 of 2
				CAD #		TOOL #		
				HZ0603C601R-11-B				
REV	DESCRIPTION			DATE	INT			
B	ADD OPERATING TEMPERATURE UPDATE LAIRD LOGO AND REFLOW CURVE			08/05/13	QU			
A	ORIGINAL DRAFT			03/01/11	WEI			