


LI0603D221R-11

UNCONTROLLED DOCUMENT



PHYSICAL DIMENSIONS:

A	1.60 [.063]	+ 0.15	[-.006]
B	0.80 [.031]	+ 0.15	[-.006]
C	0.80 [.031]	+ 0.15	[-.006]
D	0.36 [.014]	+ 0.15	[-.006]

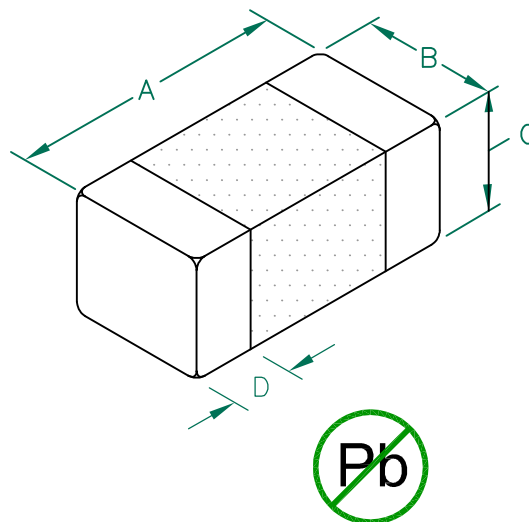


ELECTRICAL CHARACTERISTICS:			
Z @ 100MHz (Ω)	DCR (Ω)	Rated Current	
Nominal	220		
Minimum	165		
Maximum	275	0.45	450 mA

- NOTES: UNLESS OTHERWISE SPECIFIED
1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 7" REELS, 4000 PCS/REEL.
 2. REF. PREVIOUS STEWARD P/N LI0603B301R-00
 3. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
 4. OPERATEING TEMPERATURE: -40°C~+125°C.

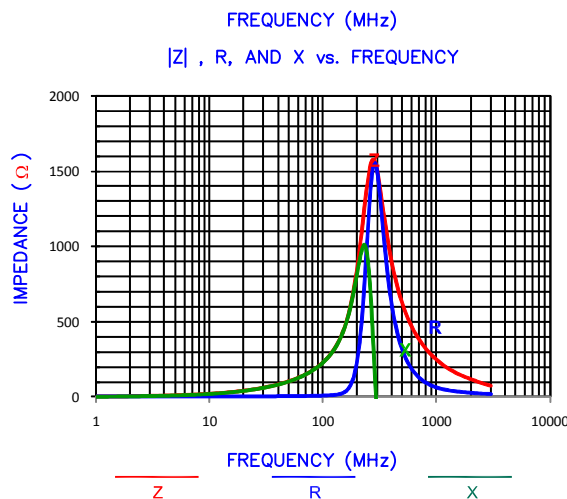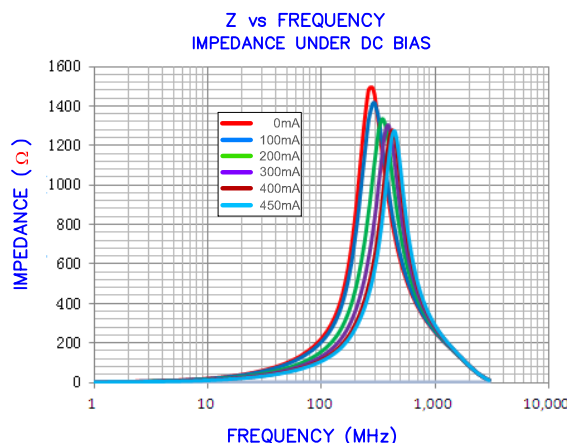


LAND PATTERNS FOR REFLOW SOLDERING

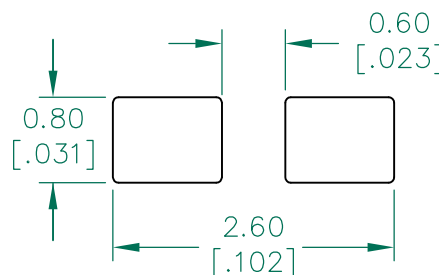

(For wave soldering, add 0.762 [.030] to this dimension)

RECOMMENDED SOLDERING CONDITIONS

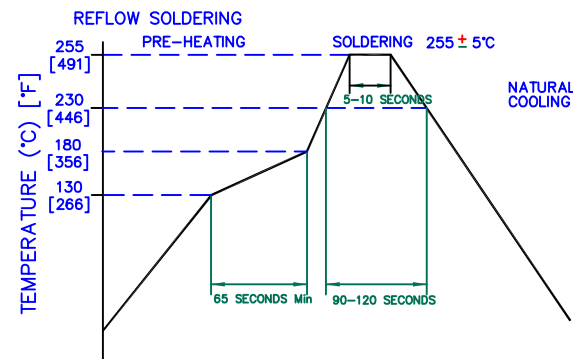

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.				Laird TECHNOLOGIES		
PROJECT/PART NUMBER: LI0603D221R-11				REV B	PART TYPE: CO-FIRE	DRAWN BY: YUKI				
B UPDATE REFLOW ADD DC BIAS CURVE ADD OPERATING TEMPERATURE				DATE: 11/21/12	QU QU	SCALE: -	SHEET: 2 of 2			
A ORIGINAL DRAFT				DATE: 03/01/11	YUKI	TOOL # -				
REV DESCRIPTION				DATE	INT	LAI0603D221R-11-B				