


IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	100 Ω	280 Ω	600 Ω
Minimum	- Ω	224 Ω	- Ω

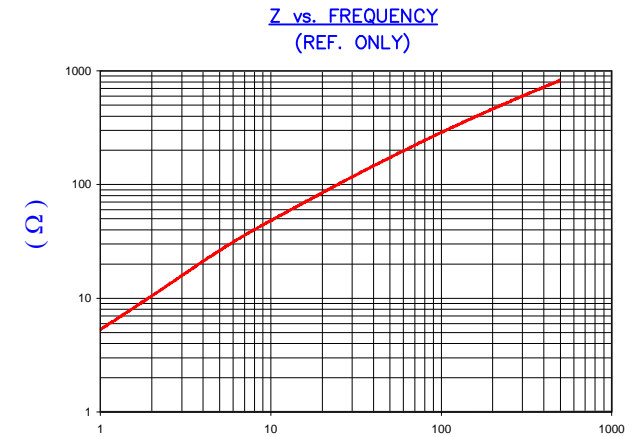

FREQUENCY (MHz)
 AGILENT E4991A Impedance/Material Analyzer
 HP 16092A-Test Fixture

FERRITE CORE DIMENSIONS (SPEC): mm [in]

A	76.20 [3.000]	+	1.52 [.060]
B	65.28 [2.570]	+	1.27 [.050]
C	28.58 [1.125]	+	0.64 [.025]
D	6.35 [.250]	+	0.25 [.010]
E	0.84 [.033]	+	0.25 [.010]
F	7.62 [.300]	+	0.18 [.007]

WEIGHT/1000 52.16 kgs 115 Lbs

NOTES:

1. REFERENCE LAIRD CORE P/N 28S2011-000.
2. ADD METAL CLIPS FOR SHIPPING P/N ASSE017-2.
3. COSMETIC SPECIFICATION REFER TO WI-QA-038.

DIMENSIONS ARE IN mm[INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.		Laird	
C	UPDATE COMPANY LOGO	01/07/13	QIU	PROJECT/PART NUMBER: 28S2011-0M0		REV C	DRAWN BY: JRK
B	UPDATE FORMAT & Z SPECS ADD CURVE	07/08/03	JRK	DATE: 02/01/02	SCALE: 1.5 : 1	MATERIAL: FERRITE	
A	ORIGINAL DRAFT	02/01/02	JRK	CAD # 28S2011-0M0-C	TOOL # S2011		
REV	DESCRIPTION	DATE	INT				