



Tflex™ HD300MTG Recommended Directions for Use

Shelf Life:

Shelf life for Tflex™ HD300MTG is 2 years from date of shipment at the storage conditions specified below.

Storage Conditions:

Recommended storage conditions are 0-35°C at relative humidity of 50% maximum. Please store in original product packaging until ready for use.

Product Form:

Sheets (maximum size available: 17.5" x 18")

Converting methods:

X-Y cutting and chopping by blade recommended and punching not recommended.

Application Instructions:

1. Remove the diamond liner by separating it from the pad at one corner. Peel back the liner in one swift, consistent motion as close to an 180° angle as possible. A light diamond embossing on the pad surface is expected due to the high compliancy of the material. (Fig.1)
2. Fold the die cutting gap filler and push the gap filler from the corner to make it separate from the clear liner. (Fig.2)
3. Peel off the gap filler from the clear liner(Fig.3) and place it onto desired substrate.
4. Visible residue on the liner is normal for this material when peeling off the gap filler from the liner and it will not affect the gap filler's performance. (Fig.4)
5. Small wrinkles can be seen on the surface of the gap filler and will not affect the gap filler's performance. (Fig.5)
6. Cover the exposed gap filler or continue the assembly process to avoid contamination of the surface from dust and debris.

A17855-00 Rev A 4/15/2018 DCO

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Technologies materials rests with the end user. Laird Technologies makes no warranties as to the fitness, merchantability, suitability or non-infringement of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any

kind. All Laird Technologies products are sold pursuant to the Laird Technologies' Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2018 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trademarks or registered trademarks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights.



Tflex™ HD300MTG Recommended Directions for Use

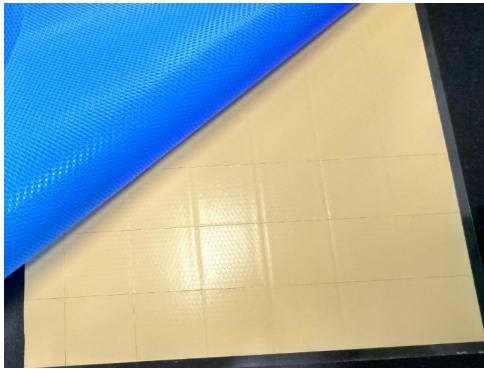


Fig.1

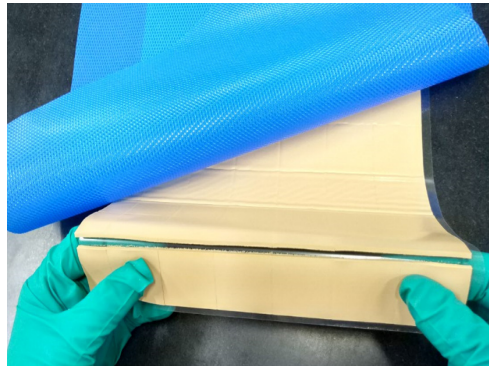


Fig.2

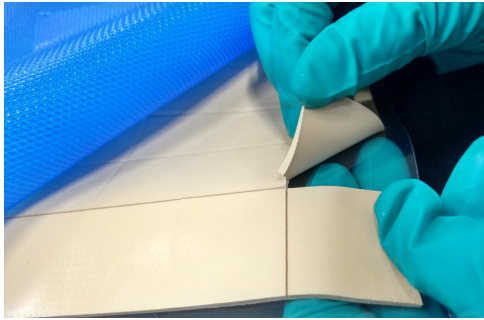


Fig.3

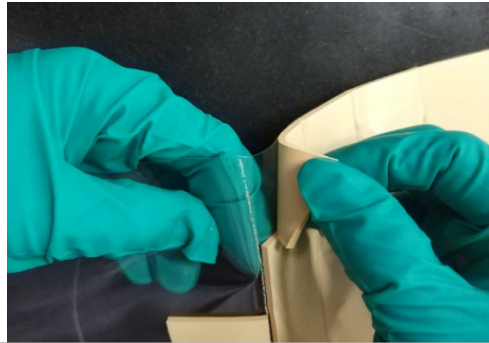


Fig.4



Fig.5

A17855-00 Rev A 4/15/2018 DCO

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Technologies materials rests with the end user. Laird Technologies makes no warranties as to the fitness, merchantability, suitability or non-infringement of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies' Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2018 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trademarks or registered trademarks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights.