


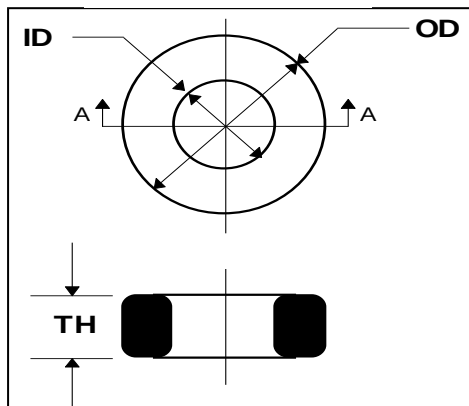

CORE DIMENSIONS 28T0082-200

UNCOATED CORE

	MM	INCHES		MM	INCHES
OD	2.03	(.080)	±	.15	(.006)
ID	1.00	(.039)	±	.15	(.006)
TH	3.80	(.150)	±	.15	(.006)

WEIGHT / K

0.0454 KGS

.1001 LBS

INITIAL PERMEABILITY

850

ROOM TEMPERATURE ELECTRICAL SPECIFICATION

	MIN. TOL.	MIN. (μ H)	NOM. (μ H)	MAX. (μ H)	MAX. TOL.	FREQ. (kHz)	VOLT. (mV)	GAUSS	TURNS
L1-Ref.	-25.0%	0.34	0.46	0.57	25.0%	100	0.83	10	1
NET IMPEDANCE	MIN (Ω)	MIN TOL.	NOM (Ω)			FREQ. (MHz)			TURNS
Z1 (REF.)	-	-	23	-	-	25			1
Z2	26	(-25%)	35	-	-	100			1

NOTES:

1. Cosmetic Specification refer to WI-QA-015.



Rev	Description	Date	INT
A	New Release	2020/4/19	WS

Date: 2020/4/19	Tooling: T0082	Rev: A
Drawn By: WS	Title # 28T0082-200	
Laird This document contains information which is proprietary to laird. No production or publication of this document in whole or in part shall be made without written authorization from Laird.		