


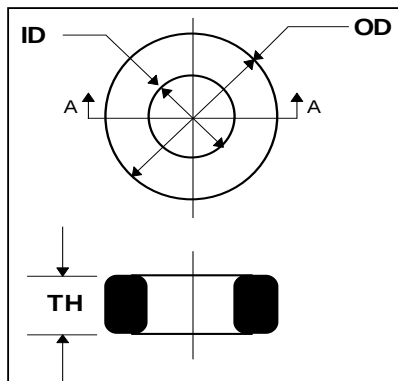

CORE DIMENSIONS **33T0140-500**

UNCOATED CORE				
	MM	INCHES		MM INCHES
OD	3.50	(.138)	±	.15 (.006)
ID	1.50	(.059)	±	.15 (.006)
TH	6.00	(.236)	±	.20 (.020)

WEIGHT / K 0.2297 KGS .5065 LBS
INITIAL PERMEABILITY **2300**

ROOM TEMPERATURE ELECTRICAL SPECIFICATION

	MIN. TOL.	MIN. (μH)	NOM. (μH)	MAX. (μH)	MAX. TOL.	FREQ. (kHz)	VOLT. (mV)	TURNS
L1-1T	-30.0%	1.64	2.339	3.04	30.0%	100	2.51	1

NET IMPEDANCE	MIN (Ω)	MIN TOL.	NOM (Ω)		FREQ. (MHz)	TURNS
Z1 (REF.)	-	-	19	- -	1	1
Z2	21	(-25%)	28	- -	5	1

NOTES:

1. Cosmetic Specification refer to WI-QA-015.



Rev	Description	Date	INT
A	New release	2020/4/19	WS

Date: 2020/4/19	Tooling: T0140	Rev:
Drawn By: WS	Title # 33T0140-500	A
Steward This document contains information which is proprietary to Steward. No production or publication of this document in whole or in part shall be made without written authorization from Steward.		