


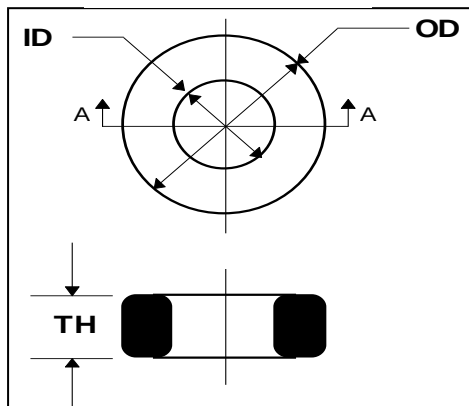

CORE DIMENSIONS 33T0157-900

UNCOATED CORE

	MM	INCHES		MM	INCHES
OD	4.00	(.157)	±	.15	(.006)
ID	2.01	(.079)	±	.15	(.006)
TH	6.85	(.270)	±	.20	(.008)

WEIGHT / K

0.3136 KGS

.6914 LBS

INITIAL PERMEABILITY

2300

ROOM TEMPERATURE ELECTRICAL SPECIFICATION

	MIN. TOL.	MIN. (μ H)	NOM. (μ H)	MAX. (μ H)	MAX. TOL.	FREQ. (kHz)	VOLT. (mV)	GAUSS	TURNS
L1-Ref.	-30.0%	1.52	2.172	2.82	30.0%	100	2.91	10	1
NET IMPEDANCE	MIN (Ω)	MIN TOL.	NOM (Ω)			FREQ. (MHz)			TURNS
Z1 (REF.)			18	-	-	1			1
Z2	20	(-25%)	26	-	-	5			1

NOTES:

1. Cosmetic Specification refer to WI-QA-015.



Rev	Description	Date	INT
A	New Release	2020/4/19	WS

Date: 2020/4/19	Tooling: T0157	Rev:
Drawn By: WS	Title # 33T0157-900	A

Laird This document contains information which is proprietary to laird. No production or publication of this document in whole or in part shall be made without written authorization from Laird.