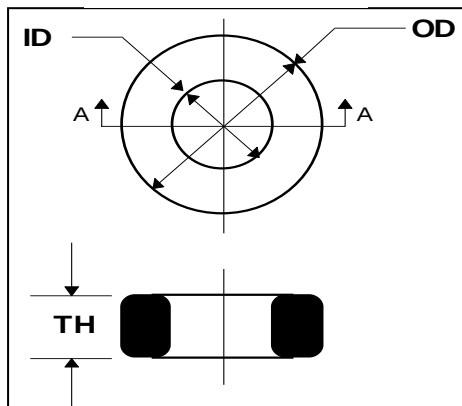


**CORE DIMENSIONS****40T0232-200****UNCOATED CORE**

	MM	INCHES		MM	INCHES
OD	5.84	(.230)	±	.15	(.006)
ID	3.05	(.120)	±	.15	(.006)
TH	1.65	(.065)	±	.15	(.006)

SINGLE PARAYLENE**40T0232-20P**

OD	5.87	(.231)	±	.15	(.006)
ID	3.02	(.119)	±	.15	(.006)
TH	1.68	(.066)	±	.15	(.006)

WEIGHT / K

0.1569 KGS

.3459 LBS

INITIAL PERMEABILITY

10000**ROOM TEMPERATURE ELECTRICAL SPECIFICATION**

	MIN. TOL.	MIN. (μH)	NOM. (μH)	MAX. (μH)	MAX. TOL.	FREQ. (kHz)	VOLT. (mV)	GAUSS	TURNS
L1-1T	-30.0%	1.50	2.147	2.79	30.0%	100	0.99	10	1

COATING SPECIFICATIONS

TYPE	Ref. Coating (mm / mils.)	Min. DLB VAC	TEST FORCE (LB)
Paraylene	(0.0127 / 0.5)	1000	.30

NOTES:

1. Cosmetic Specification refer to WI-QA-015.



Rev	Description	Date	INT
A	New release	2020/4/12	WS

Date: 2020/4/12	Tooling T0232	Rev:
Drawn By: WS	Title # 40T0232-20P	A

Laird This document contains information which is proprietary to laird. No production or publication of this document in whole or in part shall be made without written authorization from Laird.