




CORE DIMENSIONS					
UNCOATED CORE			33N0136-000		
	MM	INCHES		MM	INCHES
A	3.45	(.136)	±	.13	(.005)
B	2.01	(.079)	±	.15	(.006)
C	2.36	(.093)	±	.25	(.010)
D	0.86	(.034)	±	.13	(.005)
E	1.45	(.057)	±	.13	(.005)
F	1.01	(.040)	±	.13	(.005)

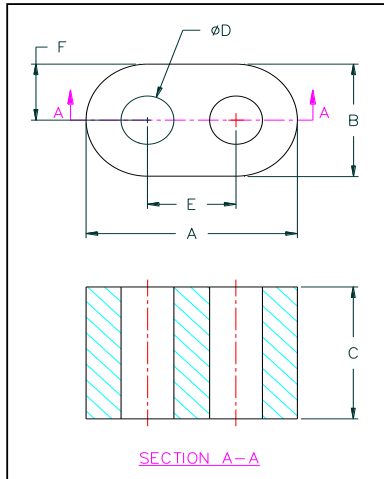

INITIAL PERMEABILITY **2300** WEIGHT / K 0.059 KGS 0.13 LBS

ROOM TEMPERATURE ELECTRICAL SPECIFICATION									
L1-Ref.	MIN. TOL.	MIN. (μH)	NOM. (μH)	MAX. (μH)	MAX. TOL.	FREQ. (kHz)	VOLT. (mV)	GAUSS	TURNS
	-30.0%	0.64	0.92	1.20	30.0%	100	2.91	10	1

NET IMPEDANCE	MIN (Ω)	MIN TOL.	NOM (Ω)		FREQ. (MHz)	TURNS
Z1 (REF.)			8	-	1	1
Z2	8	(-25%)	11	-	5	1

NOTES:

1. Cosmetic Specification refer to WI-QA-015.

Rev	Description	Date	INT
A	New release	2020/4/14	WS

Date: 2020/4/14	Tooling: N0136	Rev:
Drawn By: WS	Title # 33N0136-000	A

Steward This document contains information which is proprietary to Steward. No production or publication of this document in whole or in part shall be made without written authorization from Steward.