

Tputty[™] 508 Application Notes

Date: 3/15/2021

This application note provides general instructions for use for Tputty[™] 508.

Shipping and Storage

Shelf Life: Shelf life for Tputty™ 508 is 6 months from date of manufacturing.

Storage Conditions: Tputty™ 508 should be stored in original product packaging until ready for use. Recommended storage conditions are 0-35°C, with no special requirement on relative humidity when stored in original packaging. For cartridges, the direction to store the material is referred to the arrow from carton or sticker as in vertical tip-down dispense orientation). Tputty™ 508 is designed so it will not settle during shipping or storage and therefore should not be remixed. A slight sheen of silicone oil is possible to develop on the surface of the material when supplied in pails and will be incorporated and dispersed in the Tputty™ 508 material during the pumping/dispensing process.

Storage under High Pressure: Tputty™ 508 should not be stored under high pressure dispensing conditions. If stored for long periods under pressure some separation may be noticed.

Use

Recommended Use: Tputty™ 508 is a single part dispensable material designed with automation and vertical stability in mind. Laird has leveraged its knowledge of thermally conductive fillers and resin systems to develop a single part dispensable that demonstrates reliability in a variety of application orientations.

Tputty™ 508 is ideal for applications that can benefit from automation and allows minimization of SKUs in applications with gap variability. In addition to providing application flexibility and variable gap adaptation, Tputty™ 508 will exert minimum stress on your component while maintaining interface contact to maximize thermal transfer.

Preparation and Clean-up

Preparation for Use: Tputty™ 508 is a one part material and is ready to use out of the container. Make sure surfaces to be covered are clean and dry. Mixing of Tputty™ 508 before use is not recommended; however, the flow rate may be lower than specified on the datasheet if dispensed at temperatures below 23°C.

Clean-up: Excess material can be cleaned up using a dry rag. Residual silicone oil can be removed using a clean rag and acetone solvent.

Exposure to solvents: Tputty™ 508 is a silicone material filled with thermally conductive fillers. Exposure to organic solvents and strong bases can result in swelling or removal of the silicone carrier material resulting in degradation or loss of performance. For specific chemical resistance consult Chemical Resistance Tables for silicone materials such as the one listed at the following URL:

https://www.engineeringtoolbox.com/silicone-chemical-resistance-d_1879.html

First Aid

First Aid: Safe handling, disposal, and first aid measures are included in the SDS. Please read the SDS before using or handling this product. For further questions, please contact Laird.

Tputty[™] 508 Dispensing

Tputty[™] 508 can be dispensed with a variety of dispensing systems. The following is a partial list of recommended equipment for low and high volume dispensing and typical results that can be expected.

PACKAGING SIZE	FILL VOLUME AND WEIGHT	
75cc (2.5 oz)	56 cc	177 g
180cc (6 oz)	159 cc	503 g
360cc (12 oz)	326 cc	1030 g
600cc (20 oz)	601 cc	1900 g
<hr/>		
1 gallon	4110 cc	13 kg
5 gallon	6320 cc	20 kg

Nordson EFD Performus II Dispenser

Benchtop air pressure / time dispensing, handheld, for cartridges and syringes



Nordson Asymtek DispenseMate Dispenser with Nordson EFD 736HPA-NV valve, material supplied by Nordson EFD Rhino bulk unloader

Benchtop air pressure / time dispensing, X-Y table, for cartridges, syringes, and pails




Graco UniXact Dispenser with Graco Dispensit valve, material supplied by Graco CheckMate Supply System or DynaMite pump

Workstation positive-displacement volumetric dispensing, X-Y table, for cartridges, syringes, and pails



Typical Cartridge Dispensing Results (Low Volume Applications)

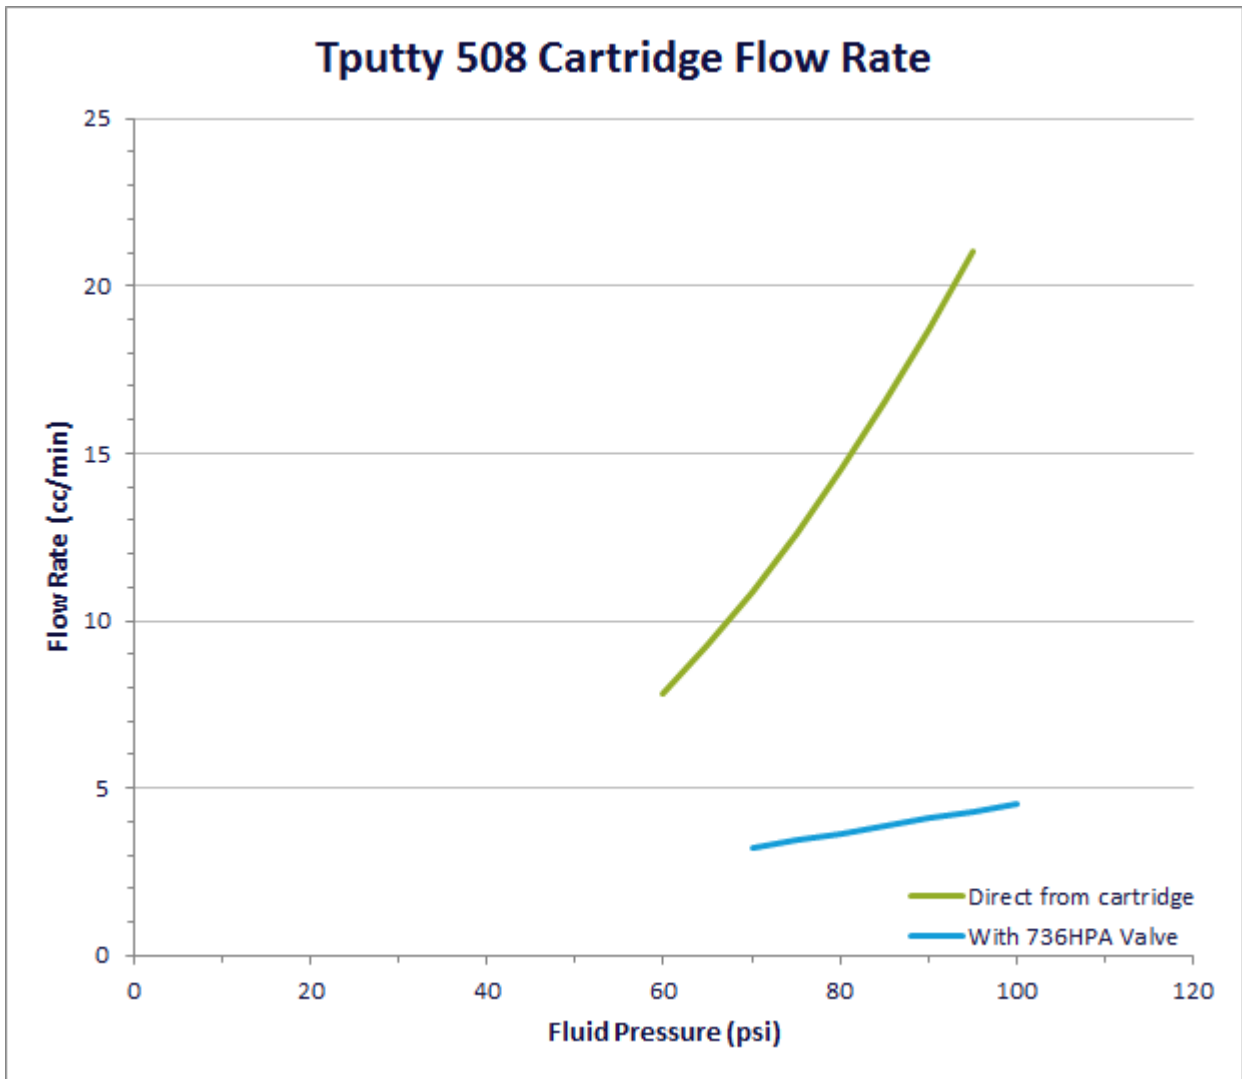

Typical Pail Dispensing Results (High Volume Applications)

