


UNCONTROLLED PRELIMINARY SPECIFICATION

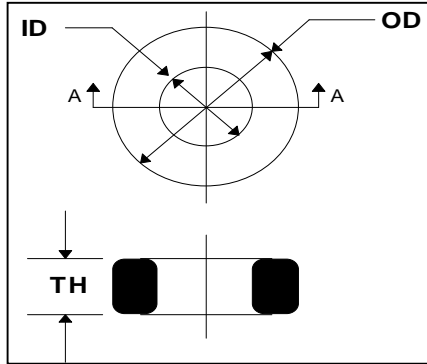

CORE DIMENSIONS					
UNCOATED CORE			40T0231-100		
	INCHES	MM		INCHES	MM
OD	.230	(5.84)	±	.006	(.15)
ID	.120	(3.05)	±	.005	(.13)
TH	.120	(3.05)	±	.005	(.13)
SINGLE PARYLENE COATING			40T0231-10P		
OD	.231	(5.87)	±	.006	(.15)
ID	.119	(3.02)	±	.005	(.13)
TH	.121	(3.07)	±	.005	(.13)

INITIAL PERMEABILITY 10000 WEIGHT / K 0.64 LBS

ELECTRICAL SPECIFICATIONS								
	MIN (μH)	MIN TOL.	NOM (μH)	MAX TOL.	MAX (μH)	FREQ. (kHz)	VOLT. (V)	URNS
L	2.776	(-30 %)	3.966	(+30 %)	5.156	100	$\leq .00091$	1
Q	REF 4		-	-		100	$\leq .00091$	1

COATING SPECIFICATIONS				
	TYPE	THK (MILS)	Min. DLB	TEST FORCE (LB)
40T0231-100	UNCOATED	-	-	-
40T0231-10P	PARYLENE	.5	1000 VDC	.30



NOTES

Rev	Description	Date	INT
A	Original Draft	6/30/1995	JBE
B	Revised Print	6/30/1995	JBE
C	Updated To New Format	6/30/1995	JBE
D	Updated Elec. Specs & Transfer To Lotus Notes	12/9/1997	IS
E	Change P/N To -10P Remove Q Coating Per TFC01-50 Part List	10/17/2005	TMB
F	Revised Template	4/27/2006	WMM

Date: 4/27/06	DWG # 40T0231-10P-F	Rev:
Drawn By: WMM	Title # 40T0231-10P	F

Steward This document contains information which is proprietary to Steward. No production or publication of this document in whole or in part shall be made without written authorization from Steward.

UNCONTROLLED DOCUMENT