


**Steward**

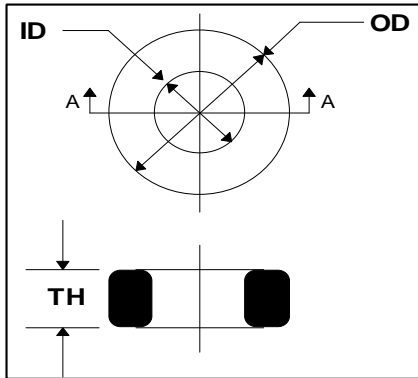

CORE DIMENSIONS				40T0375-100			
UNCOATED CORE							
	MM	INCHES		MM	INCHES		
OD	9.53	(.375)	±	.38	(.015)		
ID	4.75	(.187)	±	.38	(.015)		
TH	3.18	(.125)	±	.13	(.005)		
EPOXY COATING				40T0375-10G			
OD	9.61	(.378)	±	.46	(.018)		
ID	4.67	(.184)	±	.46	(.018)		
TH	3.26	(.128)	±	.20	(.008)		

WEIGHT / K 0.8311 KGS 1.8322 LBS  
 INITIAL PERMEABILITY 10000

ROOM TEMPERATURE ELECTRICAL SPECIFICATION									
	MIN. TOL.	MIN. (μH)	NOM. (μH)	MAX. (μH)	MAX. TOL.	FREQ. (kHz)	VOLT. (mV)	GAUSS	URNS
L1-1T	-30.0%	3.10	4.43	5.76	30.0%	100	3.24	10	1
L1-10T	-30.0%	310.0	442.8	575.7	30.0%	100	32.4	10	10
Q Ref		4							

COATING SPECIFICATIONS			
TYPE	Max. Coating (mm / mils.)	Min. DLB VAC	TEST FORCE (LB)
Epoxy	(0.0762 / 3.0)	500	.83

NOTES:



Rev	Description	Date	INT
A	Original Draft	5/15/2006	WMM

Date: 5/15/06	DWG # 40T0375-10G-A	Rev:
Drawn By: WMM	Title # 40T0375-10G	A

Steward This document contains information which is proprietary to Steward. No production or publication of this document in whole or in part shall be made without written authorization from Steward.

**UNCONTROLLED DOCUMENT**