


SEE DETAIL "A"

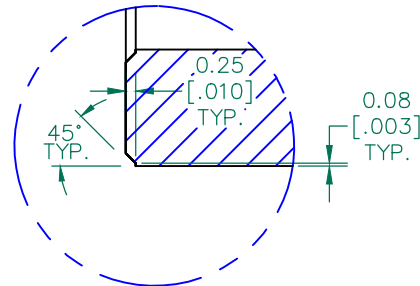

DETAIL "A"
CHAMFER
SCALE=6:1

NOTES: UNLESS OTHERWISE SPECIFIED

1. COSMETIC SPECIFICATION REFER TO WI-QA-038.


SCALE DRAWING 1:1



28R0496-000

IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	54 Ω	130 Ω	271 Ω
Minimum	- Ω	104 Ω	- Ω

Z vs. FREQUENCY
(REF. ONLY)

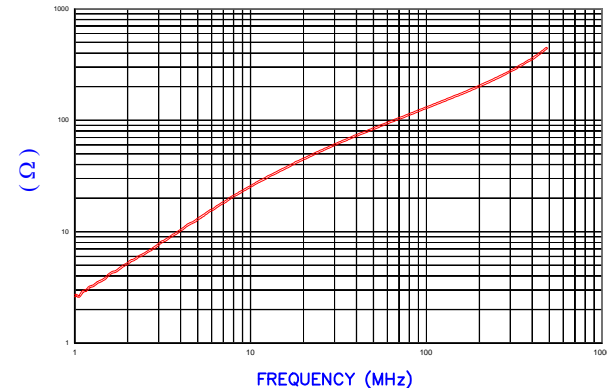

AGILENT E4991A Impedance/Material Analyzer
HP 16092A-Test Fixture, REF # 2964

FERRITE CORE DIMENSIONS (SPEC): mm [in]

A	12.60 [.496]	+ 0.30 [.012]
B	9.30 [.366]	+ 0.30 [.012]
C	16.86 [.664]	+ 0.45 [.018]
D	3.90 [.154]	+ 0.30 [.012]
E	1.30 [.051]	+ 0.30 [.012]

WEIGHT/1000 3.04 kgs [6.70 Lbs]

DIMENSIONS ARE IN mm[INCHES].

This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.



PROJECT/PART NUMBER:

28R0496-000

REV A

PART TYPE:
CNZ RIBBON
CORE

DRAWN BY:
QIU

DATE: 01/14/14

SCALE: 3 : 1

MATERIAL:

Ferrite

REV	DESCRIPTION	DATE	INT
A	ORIGINAL DRAFT	01/14/14	QIU

CAD # 28R0496-000-A

TOOL # R0496