


NET IMPEDANCE (Z)			
Frequency	300 MHz	500 MHz	1 GHz
Nominal (REF)	274 Ω	350 Ω	256 Ω
Minimum	- Ω	280 Ω	- Ω

NET Z,R AND X vs. FREQUENCY

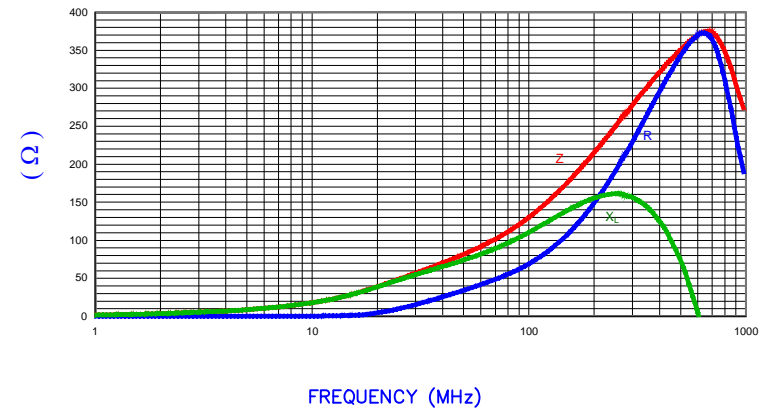

AGILENT E4991A Impedance/Material Analyzer
HP 16092A-Test Fixture, REF#3889


NOTES:

1. ASSEMBLED PART #: HFA150066-0A0
2. CASE COLOR: WHITE - "0A0"
3. CORE DIMENSIONS REFER TO HFA150066-000 SPEC. FERRITE CORE DIMENSION IS FOR INTERNAL PURPOSE TO ENHANCE FITTING TO CASE AND ELECTRICAL CHARACTERISTICS ONLY.
4. COSMETIC SPECIFICATION REFER TO WI-QA-038.



CASE DIMENSIONS:

A	18.15 [.715]	±	1.00 [.039]
B	7.05 [.278]	±	0.35 [.014]
C	32.50 [1.280]	±	1.00 [.039]
D	18.90 [.744]	±	1.00 [.039]
E	3.40 [.134]		Ref.

DIMENSIONS ARE IN mm[INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
J	UPDATE CASE DIMENSIONS REMOVE CORE DIM AND ADD NOTE 3&4	01/13/14	Jcai				
H	UPDATE CASE TOLERANCE	11/09/12	Jcai				
G	REMOVE CORE & CASE P/N REFERENCE	05/17/06	TMB	PROJECT/PART NUMBER:	REV	PART TYPE:	DRAWN BY:
F	REMOVE NOTES 1, 3, & 4 CHANGE CORE "C" & "D" DIM TOLERANCES TO ±0.64 [.025] & ±0.15 [.006] REVISE CASE DIMS A, B, & D ADD DIM E TO CASE	04/01/06	TMB	HFA150066-0A0	J	FERRITE SNAP-ON	JRK
REV	DESCRIPTION	DATE	INT	DATE:	SCALE:	MATERIAL:	
				01/28/03	NTS	Ferrite	
				CAD # HFA150066-0A0-J	TOOL #		
					-		